

## Cordless polishing without compromise



# Freedom from cables!

FLEX is and remains the measure of all things for professional polishing quality. This applies unrestrictedly – and now without awkward cables as well. High end surface finishing then becomes as independent and flexible as never before.

A matter of course: With battery technology too, FLEX is uncompromising in system performance and reliability.





#### Perfect balance

Maximum freedom of movement and ergonomics for the user. The optimal location of the battery not only perfects the spread of weight, but also promotes the polisher's high-response manoeuvrability without disruptive elements and any possible contact with the painted workpiece. Never before has the polisher been so responsive!





## Cordless rotary polisher PE 150 18.0-EC

Concentrated power with high speed for high removal rate

















#### The polisher for pros

Owing to the their powerful and fast action, rotary polishers are best committed to the hands of experienced users. This rotary work leaves holograms in the paint that can afterwards be removed with the random orbital finisher.

#### **Applications**

- Car restorers
- Automotive workshops
- Smart repair
- Aviation
- Maritime
- Acrylic glass industry

Abrasiveness
Speed <sup>1)</sup>
Holograms <sup>2)</sup>
Hologram removal

TECHNICAL DATA PE 150 18.0-EC	
Max. polishing pad Ø	160 mm
Max. backing pad Ø	150 mm
Tool holder	M14
No-load speed	150 - 1450 rpm
Battery voltage	18 V
Battery capacity	2.5 / 5.0 Ah
Average battery runtime 2.5 Ah	up to 15 min
Average battery runtime 5.0 Ah	up to 35 min
Weight without battery	1.9 kg
Weight with 5.0 Ah battery	2.7 kg

#### PE 150 18.0-EC

#### Standard equipment

- 1 Velcro backing pad, Ø 150 mm
- 1 handle
- 1 carrying case L-BOXX® 238
- 1 case insert

Part	Part no.
PE 150 18.0-EC	459.062

#### PE 150 18.0-EC/5.0 Set

#### Standard equipment

- 1 Velcro backing pad,
   Ø 150 mm
- 1 handle
- 2 rechargeable batteries5.0 Ah, AP 18.0/5.0
- 1 charger CA 10.8/18.0
- 1 carrying case L-BOXX<sup>®</sup> 238
- 1 case insert

Part no.
447.153

#### PE 150 18.0-EC/5.0 P-Set

#### Standard equipment

- 1 polishing sponge PS-0 160
- 1 polishing sponge PS-V 160
- 1 polishing wool pad TW-PT 160
- 1 polish P03/06-LDX 250 ml
- 1 polish P05/05-LDX 250 ml
- 1 microfibre cloth MW-P1 Velcro backing pad,
- Ø 150 mm
- 2 rechargeable batteries5.0 Ah, AP 18.0/5.0
- 1 chargerCA 10.8/18.0
- 1 carrying case L-B0XX® 238
- 1 case insert
- 1 handle

Part	Part no.
PE 150 18.0-EC/5.0 P-Set	461.229



# Cordless random orbital polisher, free running XFE 15 150 18.0-EC

Gentle to the surface and easy to operate















#### The polisher for the fine work

Random orbital polishers remove material gently for reliable results. They are therefore suitable for semiprofessionals and beginners with a love for detail.

#### **Applications**

- Car restorers
- Automotive workshops
- Smart repair
- Aviation
- Automotive trade
- Maritime
- Acrylic glass industry

	iveness			
Speed				
			П	
	rams <sup>2)</sup>			
Holog	ram ren	noval		

TECHNICAL DATA XFE 15 150 18.0-EC	
Max. polishing pad Ø	160 mm
Max. backing pad Ø	150 mm
Stroke	15 mm
No-load speed	2300 - 3800 rpm
Stroke rate at no-load	4600 - 7600 rpm
Battery voltage	18 V
Battery capacity	2.5 / 5.0 Ah
Average battery runtime 2.5 Ah	up to 20 min
Average battery runtime 5.0 Ah	up to 45 min
Weight without battery	2.1 kg
Weight with 5.0 Ah battery	2.8 kg

#### XFE 15 150 18.0-EC

#### Standard equipment

- 1 Velcro backing pad, Ø 125 mm
- 1 carrying case L-BOXX<sup>®</sup> 238
- 1 case insert

Part	Part no.
XFE 15 150 18.0-EC	459.089

#### XFE 15 150 18.0-EC/5.0 Set

#### Standard equipment

- 1 Velcro backing pad, Ø 125 mm
- 2 rechargeable batteries5.0 Ah, AP 18.0/5.0
- 1 chargerCA 10.8/18.0
- 1 carrying case L-B0XX<sup>®</sup> 238
- 1 case insert

Part	Part no.
XFE 15 150 18.0-EC/5.0 Set	418.099

#### XFE 15 150 18.0-EC/5.0 P Set

#### Standard equipment

- 1 polishing sponge PS-0 160
- 1 polishing sponge PS-R 160
- 1 polish P03/06-LDX 250 ml
- 1 sealant W02/04 250 ml
- 1 microfibre cloth MW-PC
- 1 Velcro backing pad, Ø 125 mm
- 2 rechargeable batteries5.0 Ah, AP 18.0/5.0
- 1 chargerCA 10.8/18.0
- 1 carrying case L-B0XX<sup>®</sup> 238
- 1 case insert

Part	Part no.
XFE 15 150 18.0-EC/5.0 P Set	461.237

## Strong performance with system

Polish and pad play a crucial role in the polishing process. FLEX therefore provides a perfectly coordinated system with an optimum range of sponges for every application: simply use the correct colour to successfully achieve your goal.







### Abrasive paste P 05/05-LDX

High removal rate with maximum sheen

The universal high-performance abrasive paste removes P1500 grit abrasion marks in seconds.

- Suitable for all types of paint
- Contains no wax, silicone, or odorous solvents
- For use with rotary and random orbital polishers
- Abrasiveness 5 / gloss level 5

### Special polish P 03/06-LDX

Scratch removal with a deep sheen

Ideal for polishing P2000 grit abrasion marks and for reviving old paintwork.

- Suitable for all types of paint
- Low-dust and silicone-free polish
- For single-stage random orbital polishing or rotary polishing
- Abrasiveness 3 / gloss level 6

### Sealant W 02/04

Liquid preservation

Perfect paintwork protection with Carnauba wax

- For new or freshly polished paintwork
- Can be painted over
- Contains no abrasive particles
- Protects, cares for and maintains high sheen
- Can be applied with the red manual applicator sponge or with the orange sponge and a polisher
- Protective effect 2 / smoothness 4

**Part no.**443.271

Part no. 443.298

Part no.

443.301

















#### Sponge types


	reen sponge – PSX-G	Cutting power		Part	Part no.
	very hard, reticulated foam with an innovative X-Cut surface that guar-			Ø sizes	
	ntees a uniform and very high removal rate even when used with the			PSX-G 40 VE2	442.631
	andom orbital polisher. The X-Cut texture also reduces heat generation.		(ADD)	PSX-G 80 VE2	434.264
	he foam is heat resistant, tear resistant, and has a very good service			PSX-G 140	434.272
li	fe.			PSX-G 160	434.280
				PSX-G 200	434.299
V	iolet sponge – PS-V	Cutting power		Part	Part no.
	hard, reticulated foam for optimum cooling and a uniform and high	3,	(( ) )	Ø sizes	
	emoval rate. It is slightly less abrasive than the green sponge PSX-G and			PS-V 40 VE2	442.658
	sideal for fresh coats of paint. The foam is heat resistant, tear resistant			PS-V 80 VE2	434.442
	nd has a good service life.			PS-V 140	434.450
	,			PS-V 160	434.469
				PS-V 200	436.410
	De O	6.11		Dt	Dl
	Prange sponge – PS-0 . medium-hard, reticulated foam with a fine foam texture. It is heat	Cutting power		Part Ø sizes	Part no.
	esistant, very tear resistant and has a good service life.			PS-0 40 VE2	442.666
				PS-0 80 VE2	434.302
				PS-0 140	434.310
				PS-0 160	434.329
				PS-0 200	434.337
				P3-0 200	434.337
	led sponge – PS-R	<b>Cutting power</b>		Part	Part no.
	very soft, reticulated foam with a fine foam texture. It has a special			Ø sizes	
	erfectTouch sandwich structure with an additional, firmer, white foam			PS-R 40 VE2	442.674
	ayer which gives the pad greater rigidity. This special structure also			PS-R 80 VE2	434.345
ir	ncreases the service life of the polishing pad.			PS-R 140	434.353
				PS-R 160	434.361
				PS-R 200	434.426
E	clue sponge – Microfibre polishing pad MC-PT 160 specially for random orbital polishers, particularly those with a	Cutting power		Part Ø sizes	Part no.
t a T	ree-running pad. With these tools, a microfibre pad is more effective han a standard wool pad for heavy cutting work. The microfibre pad is lso equipped with the tried and tested PerfectTouch sandwich surface. his ensures good pressure distribution without softening the orbital novement.			MC-PT 160	434.434
	White pad – Wool polishing pad TW-PT he TopWool pad is made of 90% natural wool and 10% polyester. This	Cutting power		Part Ø sizes	Part no.
	ombination produces a better service life and more volume. The special			TW-PT 80	420.484
	erfectTouch structure with the additional orange foam layer gives the			TW-PT 140	376.515
	ad gentle cushioning and greater rigidity.			TW-PT 160	376.523
r	g			1W-11 100	370.323
S	mall red sponge – manual application sponge PUK-R 130	Cutting power	Ma	Part	Part no.
	his sponge has an ergonomic shape and a very soft, reticulated foam			Ø sizes	
S	rith a fine foam texture. It is perfect for the manual application of ealants and care products to painted and plastic surfaces. An ideal upplement for difficult to reach places or sensitive surfaces that are ifficult to treat with a tool, for example.			PUK-R 130	442.682
S	lassic microfibre polishing cloth MW-C eamless, washable. For the careful removal of polishing and sealing		May	Part	Part no.
	esidues.			MW-C	317.098
T o	remium microfibre polishing cloth MW-P he pile is very long and soft for the reliable and very gentle absorption f residues. It can also be used for washing the car. Long service life,			MW-P	376.531
	fresidues. It can also be used for washing the car. Long service life, nachine washable (do not use fabric softener).				

## The right drive

FLEX provides the whole range of drive technologies for polishers and thus solutions for all types of user, be they a professional or a beginner with little experience. As a matter of principle: rotary polishers belong exclusively in experienced hands because of their high removal rate and usually require subsequent finishing with a random orbital polisher.


#### Rotary


- Highest removal rate
- Rotary polishers require experience
- Quickest way to remove scratches
- Hologram formation possible




## Random orbital, free running

- Suitable for all types of user
- Easy handling
- No hologram formation
- Low removal rate
- Perfect for finishing







- 1) Time required to remove damage
- 2) Risk of hologram formation

Rotary



Random orbital, free running



Rotary




Random orbital, free running




## The right choice

FLEX gives you a clear overview. So that application, tool and accessories produce the perfect result.

#### **Damage**

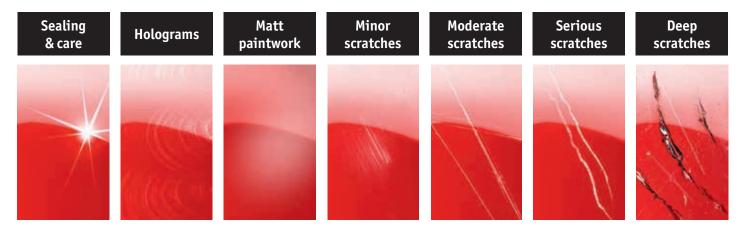

#### Fields of application of the drive types

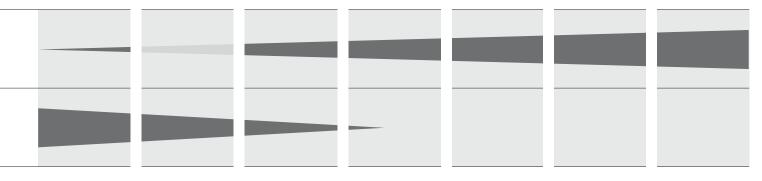

#### Fields of application of the pads and polishes



## **Powerpacks**

#### Li-ion battery packs AP 18.0 V 2.5 or 5.0 Ah

- Integrated charge and discharge protection
- Dust-proof and splash-proof
- Integrated charge status indicator shows at a glance the charge of the rechargeable battery cells


Part	Part no.
AP 18.0 V 2.5 Ah	445.886
AP 18.0 V 5.0 Ah	445.894



#### Charging station CA 10.8/18.0

- Charges 10.8 V and 18.0 V battery packs.
- Integrated battery pack cooling, overheating, discharge and overload protection
- LCD display The large-format LCD display with a charge time and charge indicator shows the remaining charge time
- Charging times
  - 40 min for 2.5 Ah battery pack
  - 50 min for 5.0 Ah battery pack

Part	Part no.
Charging station CA 10.8/18.0	417.882



- Battery adapter for FLEX battery packs
- USB charger, e.g. for smartphones or the heating jacket
- 2 USB sockets
- Energy saving mode
- With belt clip
- Charging current 1.5 A / 12.0 V
   For the 10.8 V and 18.0 V battery packs

Part	Part no.
Power source PS 10.8/18.0	417.971



More information about our range of polishers is available from your trained specialist retailer or at www.cdkstone.com.au



**FLEX-AUSTRALIA** 

1 Freighter Road Moorabbin VIC 3189 (03) 8552 6000



Your FLEX retailer: